


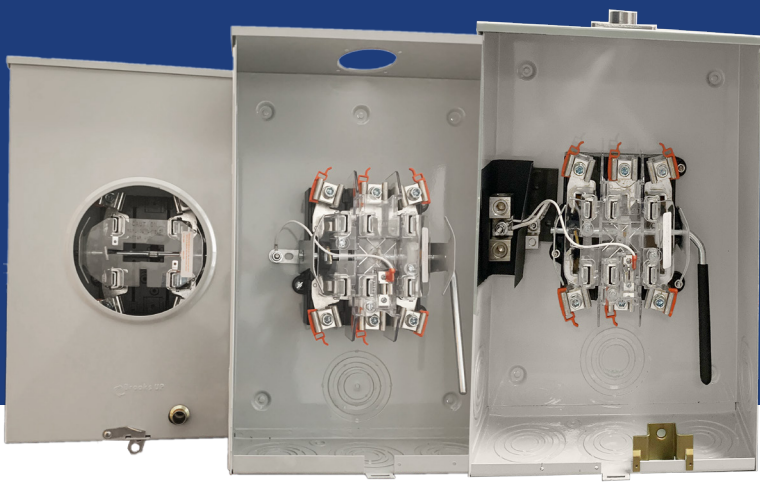

200A LEVER BYPASS METER SOCKETS

PRODUCT DATA SHEET

APPLICATIONS

Residential and commercial self-contained meter sockets configured for overhead or underground operation.

FEATURES

Rating: 60 hertz, 200 amps, 600 volts AC

Type: Ringless meter socket

Jaws: 4, 5, and 7 terminal configurations available

Service Type: Overhead or underground

Wire Terminals: Lay-in-lug type 6AWG – 350kcmil

Ground: 1/4" stud, or #2-14 screw-type terminal

Provided Neutral: Bonded, isolated, or none

Mounting: Four corner mounting embossments

Construction: 16-gauge galvanized G-90 steel, grey powder coat finish

Knockouts: (3) bottom, (1) back, (1) left side, (1) right side

OPTIONAL ACCESSORY KITS

Barrel lock provision

Hubs & cover plates

Neutral assemblies, bonded or isolated

Insulated handle

BENEFITS


Safer - Protection from contacting live electrical components.

Zero Downtime – Uninterrupted power to the residential, commercial, or industrial site.

Increased Productivity - Faster wire installation across all models.

Improved Performance – Strengthened electrical connectivity and less heat dissipation.

New Standard - Increased adoption and requirement by leading utilities.

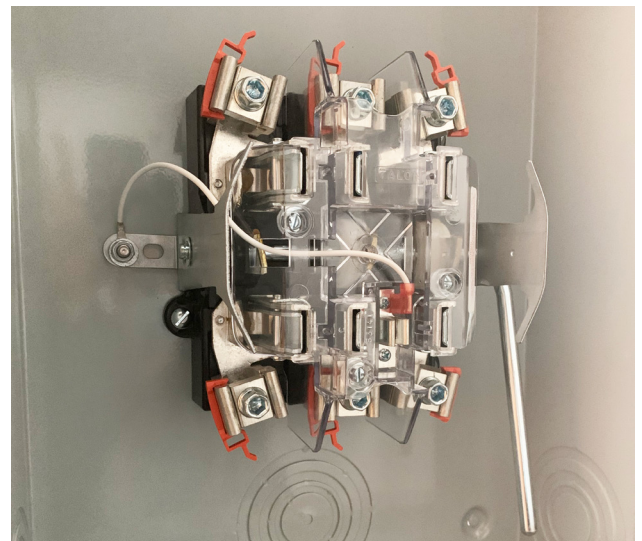

INDUSTRY STANDARDS

ANSI C12.7 – UL 414 Listed – NEMA 3R




43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksutility.com
Version 6.10.2024






200A LEVER BYPASS METER SOCKETS

DIMENSIONS AND ORDER NUMBERS

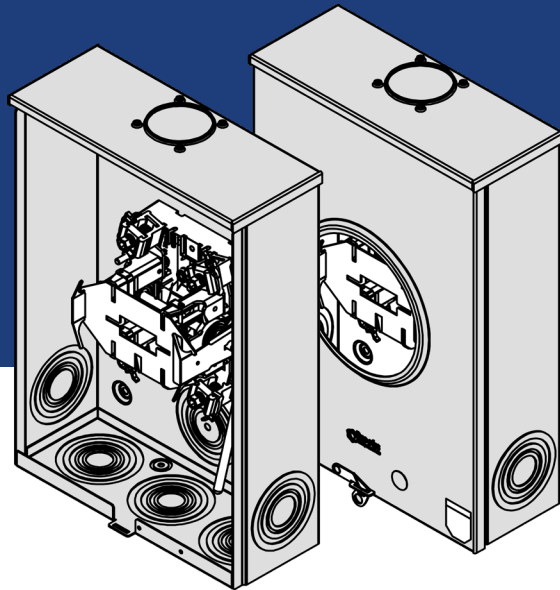

ACCESSORY ORDER NUMBERS

Part#	Description
600-3077E	2" Hub Kit
600-3077F	2 1/2" Hub Kit
600-3077A	Steel Hub Cover Plate Kit
600-3077AA	Aluminum Hub Cover Plate Kit
600-41A-0824	Snap-in Barrel Lock Bracket Kit w/ Lock Guard
600-4A-7243	200A Neutral Kit Lug #350 KCM
600-8A-5053	AWG 2-#14 Ground Lug Kit
600-23-5015	Insulated Handle Kit

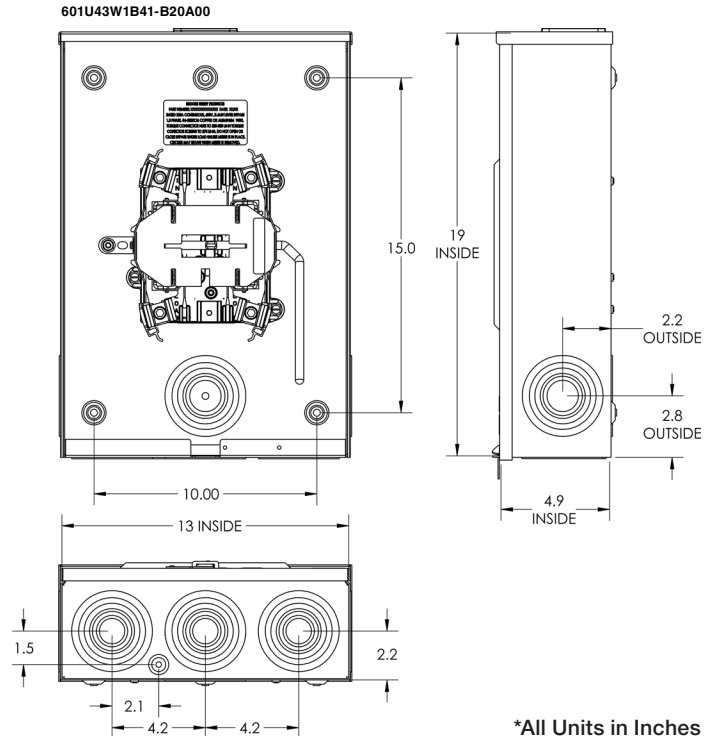

*All Units in Inches

LEVER BYPASS ORDER NUMBERS

Part #	Jaws	Provided Neutral	Lugs	Material	Ground	Hub
601U43W1B41-B20A00	4 Jaw	None	#6/350kcmil	G90	1/4" Stud	Open
601U43V3B41-B20A00	4 Jaw	Isolated #6/350kcmil	#6/350kcmil	G90	#2-14 Terminal	Open
601U43V4B41-B20A00	4 Jaw	Bonded #6/350kcmil	#6/350kcmil	G90	#2-14 Terminal	Open
601U43W1B51-B20A00	5 Jaw	None	#6/350kcmil	G90	1/4" Stud	Open
601U43V3B51-B20A00	5 Jaw	Isolated #6/350kcmil	#6/350kcmil	G90	#2-14 Terminal	Open
601U43V4B51-B20A00	5 Jaw	Bonded #6/350kcmil	#6/350kcmil	G90	#2-14 Terminal	Open
601U43W1B71-B20A00	7 Jaw	None	#6/350kcmil	G90	1/4" Stud	Open
601U43V3B71-B20A00	7 Jaw	Isolated #6/350kcmil	#6/350kcmil	G90	#2-14 Terminal	Open

Contact Brooks for additional model numbers and variations



43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksupility.com
Version 6.10.2024

