



320A LEVER BYPASS METER SOCKETS

PRODUCT DATA SHEET

APPLICATIONS

Residential and commercial self-contained meter sockets configured for overhead or underground operation.

FEATURES

Rating: Single phase, 60 hertz, 320 amps continuous / 400 amps max, 600 volts AC

Type: Ringless meter socket

Jaws: 4, 5, and 7 terminal configurations available

Service Type: Overhead or underground

Wire Terminals: 1/2" studs, or dual port #350kcmil mechanical lugs

Ground: 1/4" stud, or #2-14 screw-type terminal

Provided Neutral: Bonded, isolated, or none

Mounting: Six mounting embossments

Construction: 16-gauge galvanized G-90 steel, grey powder coat finish

Knockouts: (5) bottom, (2) back, (1) left side, (1) right side

BENEFITS


Safer - Protection from contacting live electrical components.

Zero Downtime - Uninterrupted power to the residential, commercial, or industrial site.

Increased Productivity - Faster wire installation across all models.

Improved Performance - Strengthened electrical connectivity and less heat dissipation.

New Standard - Increased adoption and requirement by leading utilities.

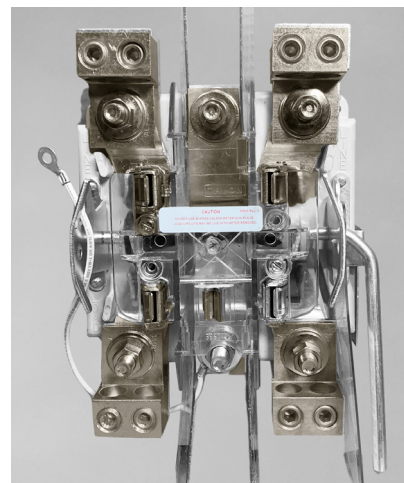

OPTIONAL ACCESSORY KITS

Barrel lock provision

Hubs & cover plates

Neutral assemblies, bonded or isolated

Insulated handle

INDUSTRY STANDARDS

ANSI C12.7 - UL 414 Listed - NEMA 3R




43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksutility.com
Version 6.10.2024






320A LEVER BYPASS METER SOCKETS

DIMENSIONS AND ORDER NUMBERS

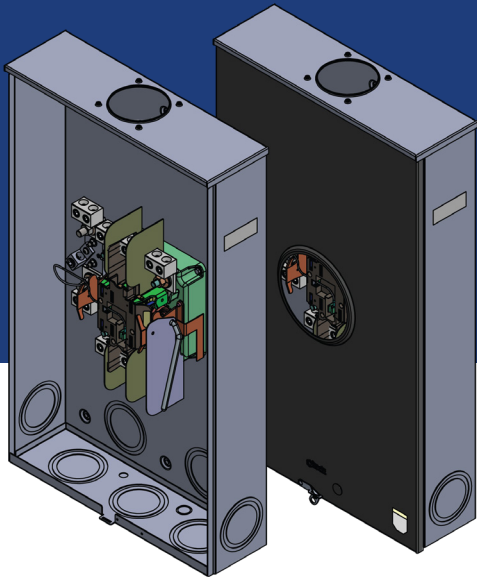

ACCESSORY ORDER NUMBERS

Part#	Description
600-3078B	3" Hub Kit
600-3078C	3 1/2" Hub Kit
600-3078D	4" Hub Kit
600-3077A	Steel Hub Cover Plate Kit
600-41A-0824	Snap-in Barrel Lock Bracket Kit w/ Lock Guard
600-4A-7249	320A Neutral Assembly w/Dual Port 350 KCM Lugs Kit
600-4A-7250	320A Neutral Assembly w/Single Port 600 KCM Lugs Kit
600-8A-5053	AWG 2-#14 Ground Lug Kit
600-23-5015	Insulated Handle Kit

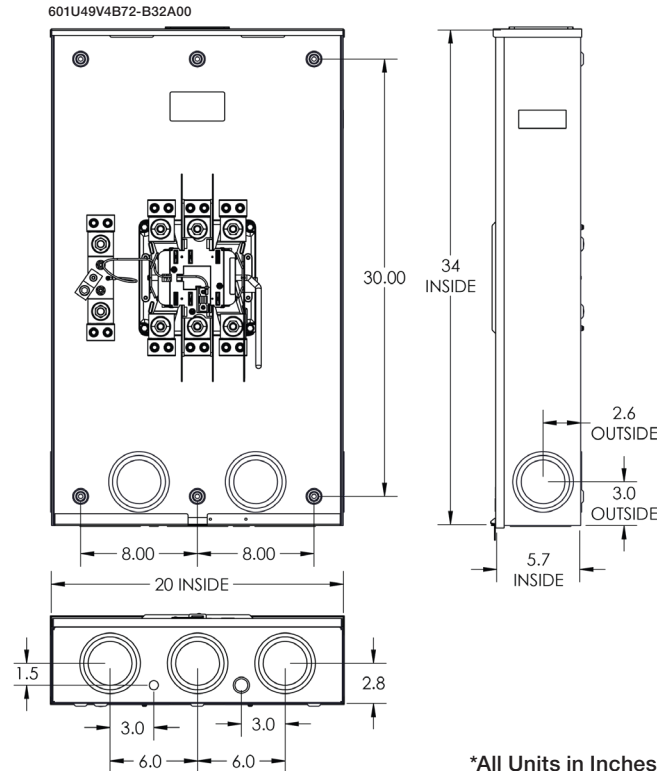

*All Units in Inches

LEVER BYPASS ORDER NUMBERS

Part #	Jaws	Provided Neutral	Lugs	Material	Ground	Hub
601U47W1B42-B32A00	4 Jaw	None	1/2" Stud	G90	1/4" Stud	Open
601U49V3B42-B32A00	4 Jaw	Isolated #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open
601U49V4B42-B32A00	4 Jaw	Bonded #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open
601U47W1B52-B32A00	5 Jaw	None	1/2" Stud	G90	1/4" Stud	Open
601U49V3B52-B32A00	5 Jaw	Isolated #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open
601U49V4B52-B32A00	5 Jaw	Bonded #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open
601U47W1B72-B32A00	7 Jaw	None	1/2" Stud	G90	1/4" Stud	Open
601U49V3B72-B32A00	7 Jaw	Isolated #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open
601U49V4B72-B32A00	7 Jaw	Bonded #6/350kcmil	Dual #6/350kcmil	G90	#2-14 Terminal	Open

Contact Brooks for additional model numbers and variations



43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksupility.com
Version 6.10.2024

