

320 A SIDEWIRE LEVER BYPASS METER SOCKETS

PRODUCT DATA SHEET

APPLICATIONS

Residential and commercial self-contained meter sockets configured for underground operation.

FEATURES

Rating: 60 hertz, 320 amps continuous / 400 amps max, 600 volts AC

Type: Ringless meter socket

Jaws: 4, 5, and 7 terminal configurations available

Service Type: Underground

Wire Terminals: 3/8" studs, 1/2" studs, single port 600KCM lugs, or dual port #350kcmil lugs

Ground: #2-14 screw-type terminal

Provided Neutral: Isolated

Mounting: Six mounting embossments

Construction: 14-gauge galvanized G-90 steel, grey powder coat finish

Knockouts: (5) bottom, (2) back, (1) left side, (1) right side

OPTIONAL ACCESSORY KITS

Barrel lock provision

Hubs & cover plates

Insulated handle

BENEFITS


Safer - Protection from contacting live electrical components.

Zero Downtime – Uninterrupted power to the residential, commercial, or industrial site.

Increased Productivity - Faster wire installation across all models.

Improved Performance – Strengthened electrical connectivity and less heat dissipation.

New Standard - Increased adoption and requirement by leading utilities.

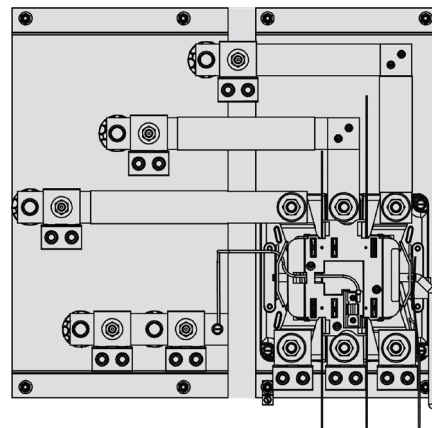


INDUSTRY STANDARDS

ANSI C12.7 – UL 414 Listed – NEMA 3R



43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksutility.com
Version 6.14.2024



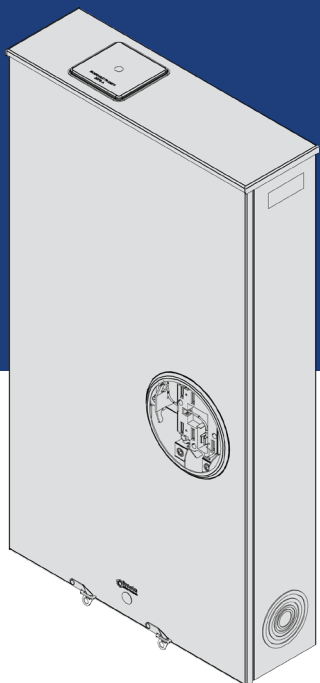


320 A SIDEWIRE LEVER BYPASS METER SOCKETS

PRODUCT DATA SHEET

ACCESSORY ORDER NUMBERS

Part#	Description
600-3078B	3" Hub Kit
600-3078C	3 1/2" Hub Kit
600-3078D	4" Hub Kit
600-3077A	Steel Hub Cover Plate Kit
600-41A-0824	Snap-in Barrel Lock Bracket Kit w/ Lock Guard
600-8A-5053	AWG 2-#14 Ground Lug Kit
600-23-5015	Insulated Handle Kit

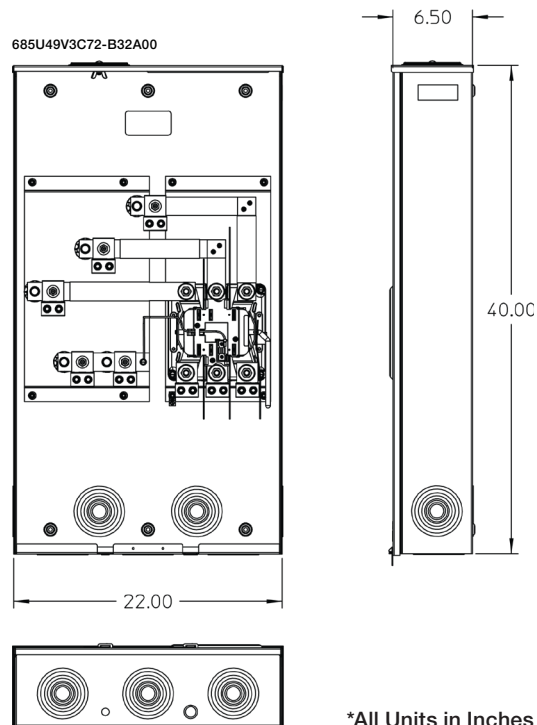

*All Units in Inches

LEVER BYPASS ORDER NUMBERS

Part #	Jaws	Amperage	Provided Neutral	Lugs: Bussing / Block	Material	Ground	Hub
685U44V3C41-B32A00	4 Jaw	320	Isolated 600KCM Single Port	600KCM Single Port	G90	#2-14 Terminal	Cover
685U47V3C42-B32A00	4 Jaw	320	Isolated 3/8" Stud	3/8" Stud / 1/2" Stud	G90	#2-14 Terminal	Cover
685U48V3C41-B32A00	4 Jaw	320	Isolated 3/8" Stud	3/8" Stud	G90	#2-14 Terminal	Cover
685U49V3C42-B32A00	4 Jaw	320	Isolated 350KCM Dual Port	350KCM Dual Port	G90	#2-14 Terminal	Cover
685U44V3C51-B32A00	5 Jaw	320	Isolated 600KCM Single Port	600KCM Single Port	G90	#2-14 Terminal	Cover
685U47V3C52-B32A00	5 Jaw	320	Isolated 3/8" Stud	3/8" Stud / 1/2" Stud	G90	#2-14 Terminal	Cover
685U48V3C51-B32A00	5 Jaw	320	Isolated 3/8" Stud	3/8" Stud	G90	#2-14 Terminal	Cover
685U49V3C52-B32A00	5 Jaw	320	Isolated 350KCM Dual Port	350KCM Dual Port	G90	#2-14 Terminal	Cover
685U44V3C71-B32A00	7 Jaw	320	Isolated 600KCM Single Port	600KCM Single Port	G90	#2-14 Terminal	Cover
685U47V3C72-B32A00	7 Jaw	320	Isolated 3/8" Stud	3/8" Stud / 1/2" Stud	G90	#2-14 Terminal	Cover
685U48V3C71-B32A00	7 Jaw	320	Isolated 3/8" Stud	3/8" Stud	G90	#2-14 Terminal	Cover
685U49V3C72-B32A00	7 Jaw	320	Isolated 350KCM Dual Port	350KCM Dual Port	G90	#2-14 Terminal	Cover



43045 West 9 Mile Rd.
Novi, MI 48375
1.888.687.3008
brooksupility.com
Version 6.14.2024

