



TOOLLESS ROTO-SEAL®

Product Data Sheet


Brooks' Toolless Roto-Seal is an acrylic body wire seal with a rotary insert that provides a safe alternative to lead wire seals.

FEATURES

- Two-piece seal with a clear acrylic body and Lexan rotary insert.
- Available with Stainless Steel wire, or non-conductive Kevlar wire.
- Heat-stamped with company name/logo and up to a seven-digit serial number.
- Optional laser etched barcode is available in: Code 128(7 characters), Code 3 of 9(5 Characters), or Interleave 2 of 5(8 Characters).
- No tools required for installation or removal.
- Available in six standard insert colors.

APPLICATIONS

The Brooks' Toolless Roto-Seal is ideal for applications with smaller diameter entry points. Designed specifically for field install, this seal provides traceability without adding steps for the line crew.

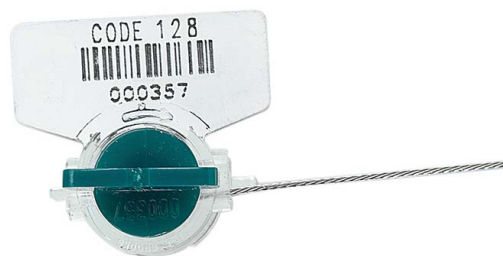


MODEL NUMBERS

74708XX-27	8" Stainless Steel Wire
74710XX-27	10" Stainless Steel Wire
74712XX-27	12" Stainless Steel Wire
74108XX-27	8" Kevlar Wire
74110XX-27	10" Kevlar Wire
74112XX-27	12" Kevlar Wire
76708XX-27	Barcoded 8" S/S Wire

NOTE: XX denotes insert color. 27 denotes clear body.

DIMENSIONS

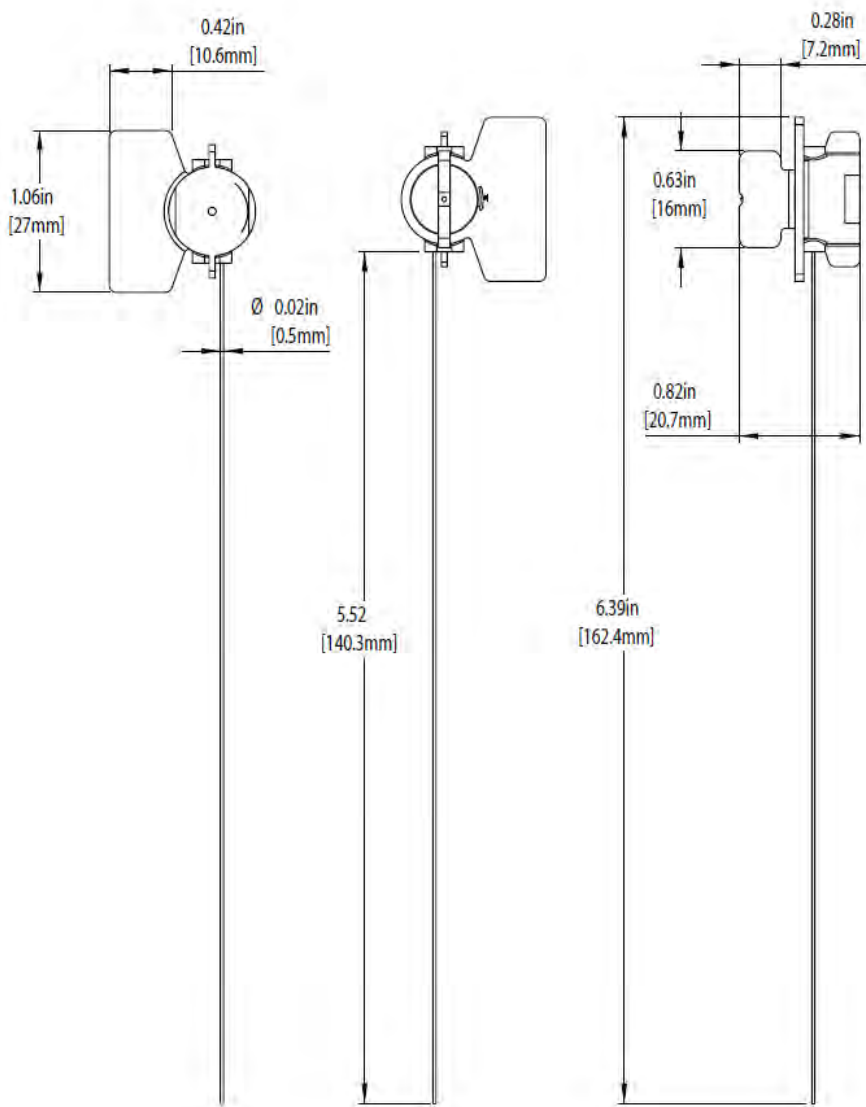

PACKAGING

WITHOUT WIRES

Standard Packaging:

100/Bag—1,000/Box—5,000/Carton

Carton Dimensions:

28" x 15" x 9"

(70cm x 37.5cm x 23cm)

WITH ATTACHED 8" WIRES

Standard Packaging:

100/Bag—500/Box—2,500/Carton

Carton Dimensions

28" x 15" x 19"

(70cm x 37.5cm x 23cm)



STANDARD INSERT COLORS

