


S-1000 SERIES BARREL LOCK & KEY PRODUCT DATA SHEET

FEATURES

- High security locking system providing unique combinations assigned with geographic exclusivity
- Lock and key combinations are non-interchangeable
- Offers progressive levels of security
- Barrel locks are constructed of hardened or stainless steel with all stainless interiors; provides a long service life and exceptional durability in high corrosive environment
- Fits all competitive locking devices that take standard length barrel locks
- Plunger O-ring prevents tampering by picking tools
- Adjustable key collar opens all standard barrel locks assuring a one key system
- Standard key tip cleaning tool in sleeve of key
- Field repairable key available

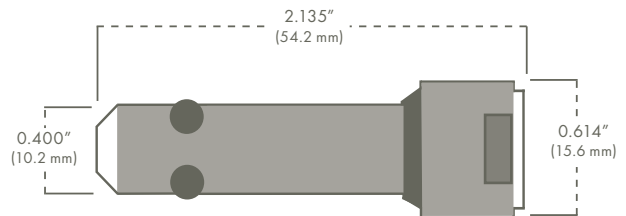

MODEL NUMBERS

BARREL LOCKS

- 8554700 - XX Stainless steel without cap
8559700 - XX Hardened steel without cap

KEYS

- 8619000 - XX Standard key
8619500 - XX Repairable key
1529715 - XX Replacement Cartridge

PACKAGING

Barrel Locks - 50 per box



S-1000 SERIES BARREL LOCK & KEY

MAINTENANCE

The following User Tips will help you extend the life and performance of your Brooks Barrel Lock Key.

- The key is an instrument, not a tool. Rough handling or abuse can damage the key fingers and prevent them from mating with the barrel lock plunger.
- You will often sense an “click” when the fingers have properly engaged the barrel lock plunger. A slight turn of the handle will assure that proper engagement occurs.
- If a key fails to open the barrel lock the first time, remove the key and reinsert. **DO NOT FORCE THE KEY OR JAM INTO THE LOCK.** If you suspect the keyway is blocked, use a Brooks Barrel Lock Cleaning Tool to remove the dirt. Try the key again.
- Keep the protective cover on the key when not in use. There is a reaming tool at the bottom of the cover. Twist the key within the protective cover occasionally to clean the tip.
- Periodically inspect your key for worn or bent fingers. Clean the key with a toothbrush to remove dirt and other material that can collect on and under the key fingers.
- Do not use lubricant on keys or barrel locks. LPS-1, a non lubricating cleaner for electronics, is OK.
- Always install a plastic weather cap on the head of the barrel lock, or a plastic cap on the seal adapter to keep dirt and insects out of the barrel lock keyway.

ACCESSORIES



Weather Cap

Completely covers the lock head protecting it from water, dirt and debris



Cleaning Tool

Clears dirt and debris from a blocked keyway enabling better key function



Barrel Lock Puller

Clamshell style puller grips tightly around the head to remove troubled locks